


S1P09R120SSF-A2 (Preliminary)



1200V / 180A SiC Power MOSFET Module

Features

- High speed switching
- Very low switching losses
- High blocking voltage with low on-resistance
- Temperature independent turn-off switching losses
- Ultra-low thermal resistance
- Isolated back-side

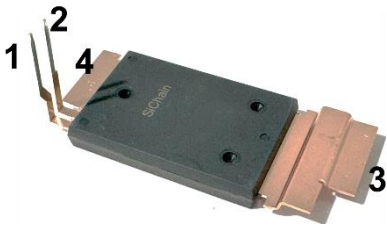

Applications

- Motor drives
- High power converters
- Induction heating equipment
- Electric traction inverter

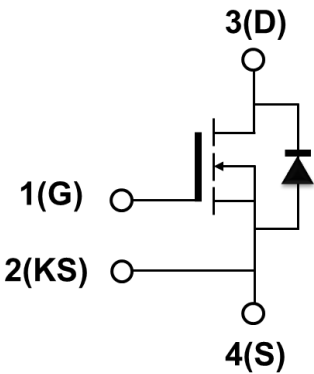


Table 1 Key performance and package parameters

Type	V _{DS}	I _{DS} (T _C = 100°C, R _{th(j-c,max)})	R _{DS(ON)} , typ (V _{GS} = 18V, I _D = 180A, T _J = 25°C)	T _{j,max}	Package
S1P09R120SSF-A2	1200 V	180A	9.0 mΩ	175°C	TPak

S1P09R120SSF-A2 (Preliminary)



1200V SiC Power MOSFET Module

Table of contents

Table of contents

Features	1
Applications	1
Table of contents.....	2
1、 Maximum ratings	3
2、 Thermal / Packaging Characteristics	4
3、 Electrical characteristics.....	5
3.1 Static characteristics.....	5
3.2 Dynamic characteristics	5
3.3 Switching characteristics	6
4、 Package drawing.....	7
5、 Test conditions	8
Revision history	9
Attention	9

1、Maximum ratings

Table 2 Maximum rating ($T_c = 25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter	Value	Unit	Test Conditions	Note
$V_{DS, \max}$	Drain source voltage	1200	V	$V_{GS} = 0\text{V}$, $I_D = 100\text{ }\mu\text{A}$	
$V_{GS, \max}$	Gate source voltage	-8 /+22	V	Absolute maximum values	
$V_{GS, \text{op}}$	Gate source voltage	-4 /+18	V	Recommended operational values	
I_D	Continuous drain current	240	A	$V_{GS} = 18\text{V}$, $T_C = 25^{\circ}\text{C}$	
		180		$V_{GS} = 18\text{V}$, $T_C = 100^{\circ}\text{C}$	
$I_{D(\text{pulse})}$	Pulsed drain current	480	A	Pulse width tp limited by $T_{j, \max}$	
P_D	Power dissipation	750	W	$T_C = 25^{\circ}\text{C}$, $T_J = 175^{\circ}\text{C}$	
T_J, T_{stg}	Operating Junction and storage temperature	-55 to +175	$^{\circ}\text{C}$		

2、 Thermal / Packaging Characteristics

Table 3 Package Characteristics

Symbol	Description	Min.	Typ.	Max.	Unit	Note
R_{th-JC}	Thermal Resistance, Junction to Case	-	0.2	-	°C/W	
V_{ISO}	Isolation Test Voltage RMS, f=50Hz, t=1min	4.0	-	-	kV	
T_{jmax}	Maximum Junction Temperature	-	175	-	°C	
T_{jop}	Operation Junction Temperature	-	-55 to +175	-	°C	
T_{STG}	Storage Temperature Range	-	-55 to +175	-	°C	

¹ Not subject to production test. Parameter verified by design/characterization.

3、Electrical characteristics

3.1 Static characteristics

Table 4 Static characteristics (Tc = 25°C unless otherwise specified)

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions	Note
$V_{(BR)DSS}$	Drain-source breakdown voltage	1200	-	-	V	$V_{GS} = 0V, I_D = 100\mu A$	
$V_{GS(th)}$	Gate threshold voltage	2.3	2.8	4	V	$V_{DS} = V_{GS}, I_D = 40mA$	
		-	2.0	-	V	$V_{DS} = V_{GS}, I_D = 40mA,$ $T_J = 175^\circ C$	
I_{DSS}	Zero gate voltage drain current	-	2	20	μA	$V_{DS} = 1200V, V_{GS} = 0V$	
I_{GSS}	Gate source leakage current	-	-	200	nA	$V_{GS} = 18V, V_{DS} = 0V$	
$R_{DS(on)}$	Current drain-source on-state resistance	-	9	12	m Ω	$V_{GS} = 18V, I_D = 180A$	
		-	15	-		$V_{GS} = 18V, I_D = 180A,$ $T_J = 175^\circ C$	
g_{fs}	Transconductance	-	90	-	S	$V_{DS} = 20V, I_D = 180A$	
		-	82	-		$V_{DS} = 20V, I_D = 180A,$ $T_J = 175^\circ C$	
$R_{g,int}$	Internal gate resistance	-	4.5	-	Ω	$V_{AC} = 25mV, f = 1MHz,$ open drain	

3.2 Dynamic characteristics

Table 5 Dynamic characteristics (Tc = 25°C unless otherwise specified)

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions	Note
C_{iss}	Input capacitance	-	8046	-	pF	$V_{DS} = 1000V, V_{GS} = 0V$ $T_J = 25^\circ C, V_{AC} = 25mV$ $f = 100KHz$	
C_{oss}	Output capacitance	-	378	-			
C_{rss}	Reverse capacitance	-	14	-			
E_{oss}	Coss stored energy	-	226	-	μJ		

S1P09R120SSF-A2 (Preliminary)



1200V SiC Power MOSFET Module

Q_{gs}	Gate source charge	-	96	-	nC	$V_{DS} = 800V, V_{GS} = -4/+18V$ $I_D = 180A$	
Q_{gd}	Gate drain charge	-	74	-			
Q_g	Gate charge	-	288	-			

3.3 Switching characteristics

Table 6 Dynamic characteristics($T_c = 25^\circ C$ unless otherwise specified)

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions	Note
E _{on}	Turn on switching energy	-	1790	-	μJ	V _{DS} = 800V, V _{GS} = -4/+18V I _D = 180A, R _g = 2.5Ω, L = 16.7μH	
E _{off}	Turn off switching energy	-	514	-			
t _{d (on)}	Turn on delay time	-	19	-	ns		
t _r	Rise time	-	27	-			
t _{d (off)}	Turn off delay time	-	46	-			
t _f	Fall time	-	11	-			

Table 7 Body diode characteristics

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions	Note
V_{SD}	Diode forward voltage	-	3.7	-	V	$V_{GS} = -4V, I_{SD} = 90A$	
		-	3.2	-	V	$V_{GS} = -4V, I_{SD} = 90A$ $T_J = 175^\circ C$	
I_S	Continuous diode forward current	-	180	-	A	$V_{GS} = -4V, T_c = 25^\circ C$	
t_{rr}	Reverse recovery time	-	36	-	ns	$V_R = 800V, V_{GS} = -4V$ $I_D = 180A$ $T_J = 175^\circ C$	
Q_{rr}	Reverse recovery charge	-	2044	-	nC		
I_{rrm}	Peak reverse recovery current	-	180	-	A		

Note : When using SiC Body Diode the maximum recommended $V_{GS} = -4V$

4、 Package drawing



5、Test conditions

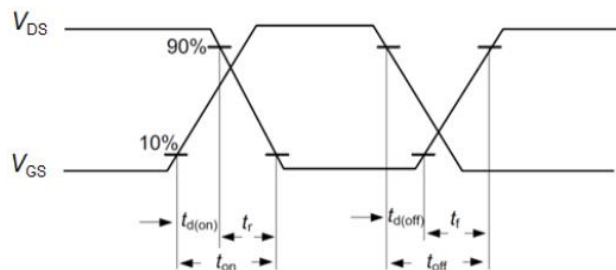


Figure A. Definition of switching times

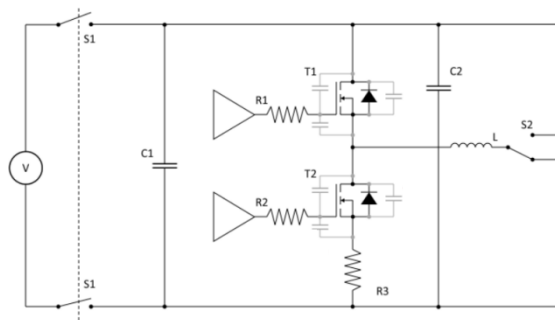


Figure B. Dynamic test circuit

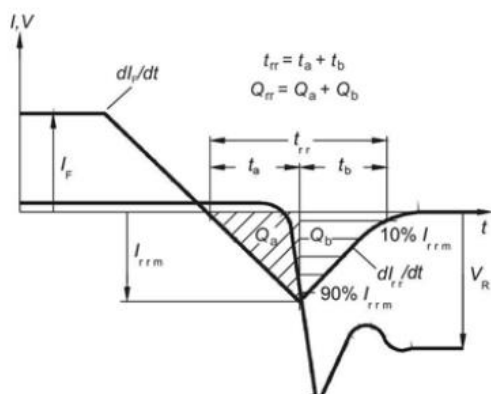


Figure C. Definition of diode switching characteristics

Figure C. Definition of body diode switching characteristics

Revision history

Document version	Date of release	Description of changes
V01_00	2024-10-13	——

Attention

1. RoHS compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/ EC (RoHS2), as implemented January 2, 2013.

2. REACH compliance

REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact a Sichain representative to insure you get the most up-to-date REACH SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request.

3. With respect to information regarding the application of the product, Sichain hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

4. Any information given in this documents subject to customer's compliance with its obligations and any applicable legal requirements, norms and standards concerning any use of the product of Sichain in any customer's applications.

5. Specifications of any and all products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment.

6. Due to technical requirements products may contain dangerous substances. For information on the types in question please contact Sichain office.

S1P09R120SSF-A2 (Preliminary)



7. Except as otherwise explicitly approved by Sichain in a written document signed by authorized representatives of Sichain, Sichain' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

8. For use of our products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a Sichain representatives, for example but not limited to: transportation equipment, primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, and power transmission systems.