

S1P05R120HBB



1200V / 240A All-Silicon Carbide MOSFET Half-Bridge Module

Features

- Electrical features
 $V_{DSS} = 1200V$
 $I_D \text{ nom} = 240A$
- High-speed Switching Possible
- High Power Density
- High Frequency Operation
- Ultra-low Losses



Applications

- Servo drives
- UPS system
- Motor drives
- High power converters
- Photovoltaic
- Wind power generation
- Induction heating equipment

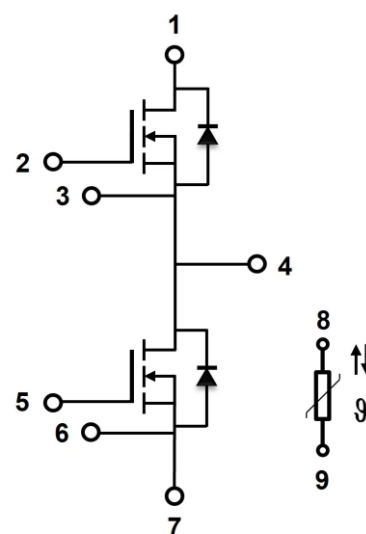


Table of contents

Features	1
Applications	1
Table of contents.....	2
1、 Maximum ratings	3
2、 Packaging Characteristics	4
3、 Electrical characteristics.....	5
4、 Package drawing.....	9
5、 Test conditions	10
Revision history	11
Attention	11

S1P05R120HBB

1200V SiC Power MOSFET Module

1、Maximum ratings

Table 1 Maximum rating (Tc = 25°C unless otherwise specified)

Symbol	Parameter	Value	Unit	Test Conditions	Note
$V_{DS,max}$	Drain source voltage	1200	V	$V_{GS} = 0V, I_D = 600 \mu A$	
$V_{GS,max}$	Gate source voltage	-8 /+22	V	Absolute maximum values	
V_{GSop}	Gate source voltage	-4 /+18	V	Recommended operational values	
I_D	Continuous drain current	240	A	$V_{GS} = 18V, T_C = 100^{\circ}C$	
$I_{D(pulse)}$	Pulsed drain current	480	A	Pulse width tp limited by $T_{j,max}$	
T_J, T_{stg}	Operating Junction and storage temperature	-40 to +175	°C		

S1P05R120HBB

1200V SiC Power MOSFET Module

2、Packaging Characteristics

Table 2 Package Characteristics

Symbol	Description	Value	Unit	Note
R _{HS}	High-side Resistance	4.5	mΩ	
R _{LS}	Low-side Resistance	4.5		
R _{th(J-C)}	Junction to case thermal resistance	0.09	°C/W	
L _S	Stray inductance	7.5	nH	
V _{ISO}	Isolation Test Voltage RMS, f=50Hz, t=1min	3	kV	
Distance	Terminal to Heatsink Creepage Distance	12.0	mm	
	Terminal to Terminal Creepage Distance	6.5	mm	
	Terminal to Heatsink Clearance	10.0	mm	
	Terminal to Terminal Clearance	5.0	mm	
T _{jmax}	Maximum Junction Temperature	175	°C	
T _{jop}	Operation Junction Temperature	-40 to +175	°C	
T _{STG}	Storage Temperature Range	-40 to +175	°C	
W	Weight	40	g	
Ms	Mounting Torque	2.0	N·m	

1200V SiC Power MOSFET Module

3、Electrical characteristics

Table 4 SiC MOSFET characteristics (Tc = 25°C unless otherwise specified)

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions	Note
$V_{(BR)DSS}$	Drain-source breakdown voltage	1200	-	-	V	$V_{GS} = 0V, I_D = 600\mu A$	
$V_{GS(th)}$	Gate threshold voltage	2.3	2.8	4.0	V	$V_{DS} = V_{GS}, I_D = 69mA$	
		-	2.0	-	V	$V_{DS} = V_{GS}, I_D = 69mA,$ $T_J = 175^\circ C$	
I_{DSS}	Zero gate voltage drain current	-	6	60	μA	$V_{DS} = 1200V, V_{GS} = 0V$	
I_{GSS}	Gate source leakage current	-	-	600	nA	$V_{GS} = 15V, V_{DS} = 0V$	
$R_{DS(on)}$	Current drain-source on-state resistance	-	5.3	7	m Ω	$V_{GS} = 15V, I_D = 240A$	
		-	8.5	-		$V_{GS} = 15V, I_D = 240A,$ $T_J = 175^\circ C$	
		-	4.5	6		$V_{GS} = 18V, I_D = 240A$	
		-	8	-		$V_{GS} = 18V, I_D = 240A,$ $T_J = 175^\circ C$	
gfs	Transconductance	-	160	-	S	$V_{DS} = 20V, I_D = 240A$	
		-	150	-		$V_{DS} = 20V, I_D = 240A,$ $T_J = 175^\circ C$	
$R_{g,int}$	Internal gate resistance	-	0.86	-	Ω	$V_{AC} = 25mV, f = 1MHz,$ open drain	
C_{iss}	Input capacitance	-	16.2	-	nF	$V_{DS} = 1000V, V_{GS} = 0V$	
C_{oss}	Output capacitance	-	0.86	-		$T_J = 25^\circ C, V_{AC} = 25mV$	
C_{rss}	Reverse capacitance	-	0.06	-		$f = 100KHz$	
Q_{gs}	Gate source charge	-	180	-	nC	$V_{DS} = 800V,$ $V_{GS} = -4/+18V$ $I_D = 200A$	
Q_{gd}	Gate drain charge	-	153	-			
Q_g	Gate charge	-	576	-			
$t_{d(on)}$	Turn on delay time	-	36	-	ns	$V_{DS} = 800V, V_{GS} = -4/+18V$ $I_D = 240A, R_g = 2.5\Omega,$ $L = 20\mu H$	
t_r	Rise time	-	45	-			
$t_{d(off)}$	Turn off delay time	-	26	-			
t_f	Fall time	-	88	-			
E_{on}	Turn on switching energy	-	4.3	-	mJ		
E_{off}	Turn off switching energy	-	4.0	-			

S1P05R120HBB

1200V SiC Power MOSFET Module

Table 5 Body diode characteristics (Tc = 25°C unless otherwise specified)

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions	Note
V _{SD}	Diode forward voltage	-	3.8	-	V	V _{GS} = -4V, I _{SD} = 120A	
		-	3.6	-	V	V _{GS} = -4V, I _{SD} = 120A T _J = 175°C	
I _S	Continuous diode forward current	-	90	-	A	V _{GS} = -4V, Tc = 25°C	
t _{rr}	Reverse recovery time	-	55	-	ns	V _R = 800V, V _{GS} = -4V I _D = 240A, di/dt=3000A/μs, T _J = 175°C	
Q _{rr}	Reverse recovery charge	-	4500	-	nC		
I _{rrm}	Peak reverse recovery current	-	275	-	A		

Table 6 NTC-Thermistor Characteristic

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions	Note
R ₂₅	Rate Resistance	-	5	-	kΩ	Tc=25°C	
ΔR/R	Deviation of R ₁₀₀	-5	-	5	%	Tc=100°C, R ₁₀₀ =489Ω	
P ₂₅	Power Dissipation	-	-	60.0	mW	Tc=25°C	
B _{25/50}	B-value	-	3380	3414	K	R2=R25exp[B25/50 (1/T2-1/T1)]	

4、Electrical characteristic diagram

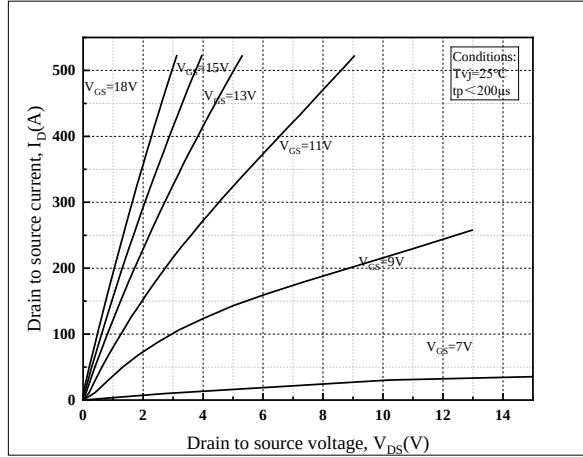


Figure 1. Output Characteristic, $T_{vj}=25^{\circ}\text{C}$

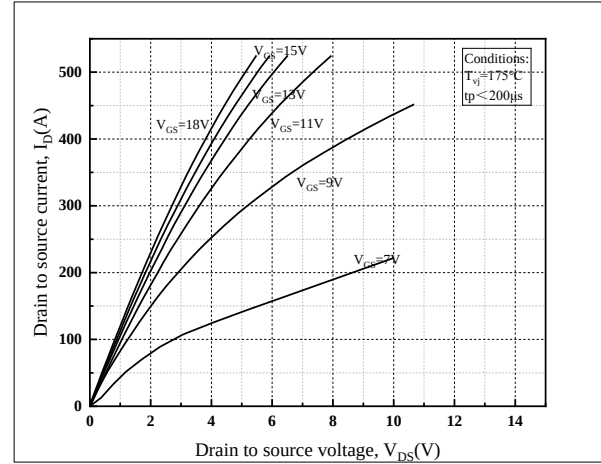


Figure 2. Output Characteristic, $T_{vj}=175^{\circ}\text{C}$

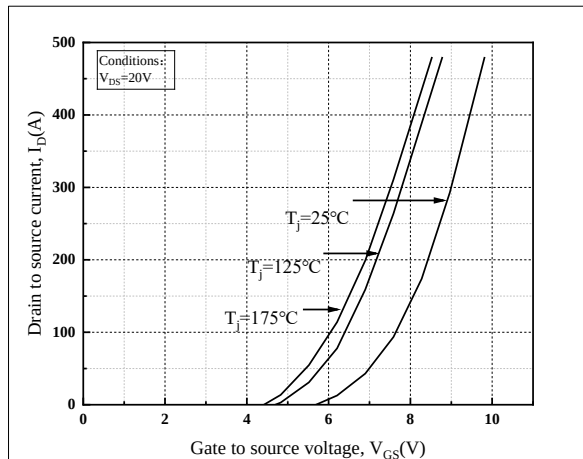


Figure 3. Transfer Characteristic

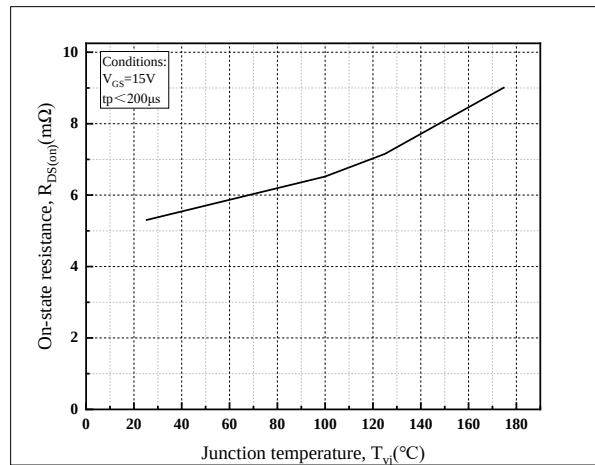


Figure 4. On-resistance VS. Junction Temperature

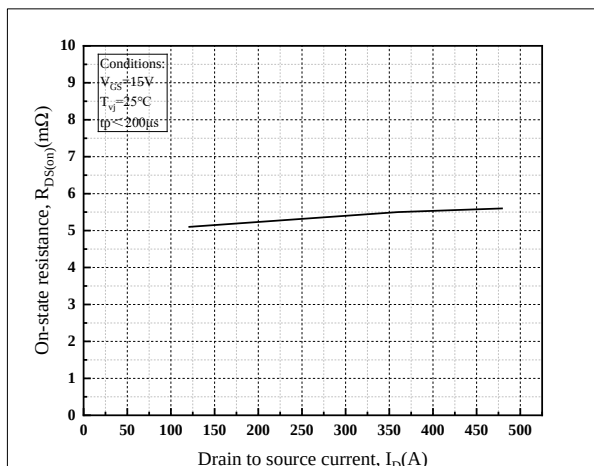


Figure 5. On-resistance VS. Drain to Source Current

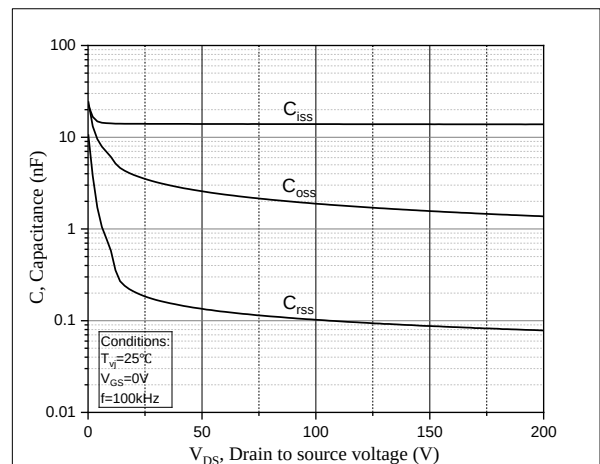


Figure 6. Capacitance VS. V_{DS}

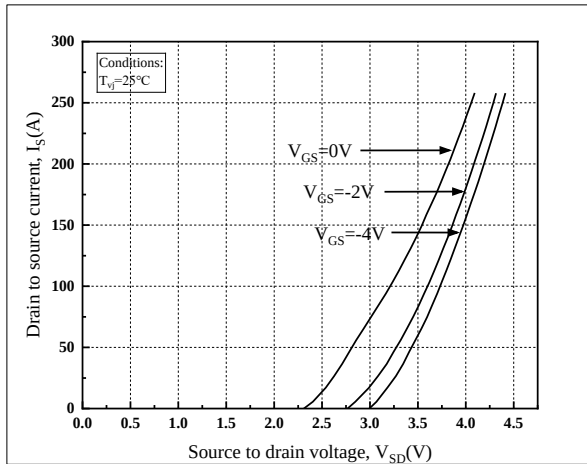


Figure 7. 3rd Quadrant Characteristic

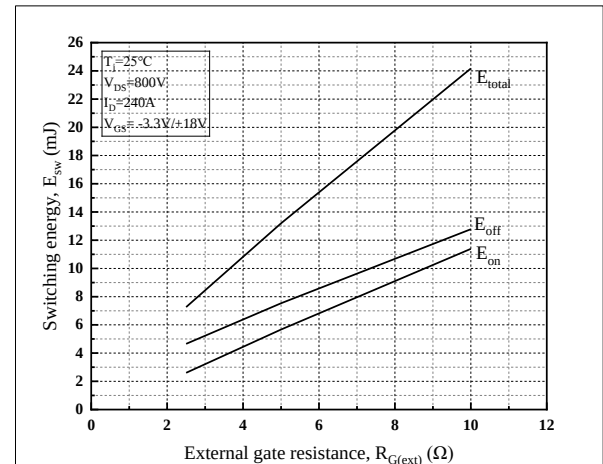


Figure 8. MOSFET Switching Energy vs. External Gate Resistance

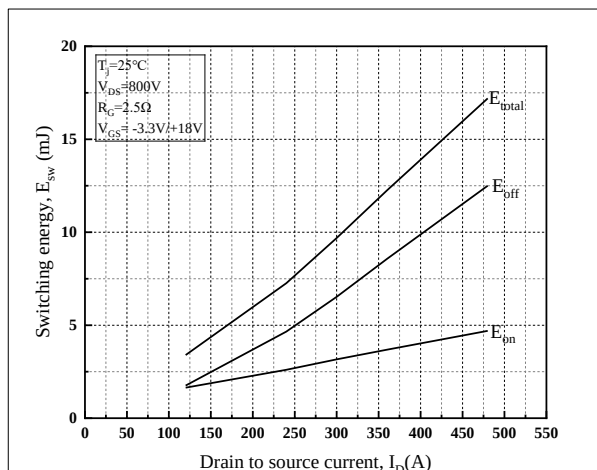


Figure 9. MOSFET Switching Energy vs. Drain to Source Current





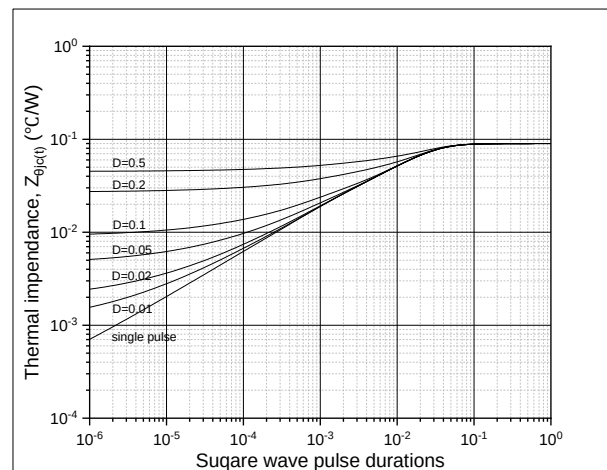


Figure 10. Transient Thermal Impedance (junction to case)

S1P05R120HBB

1200V SiC Power MOSFET Module

5、 Package drawing

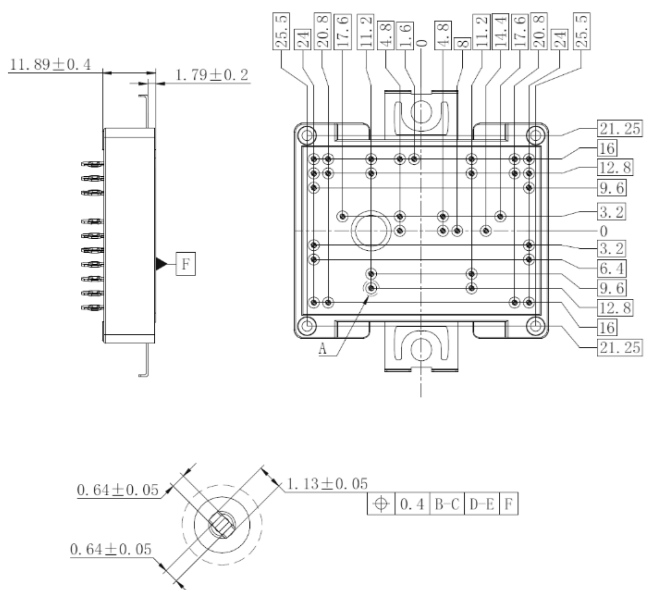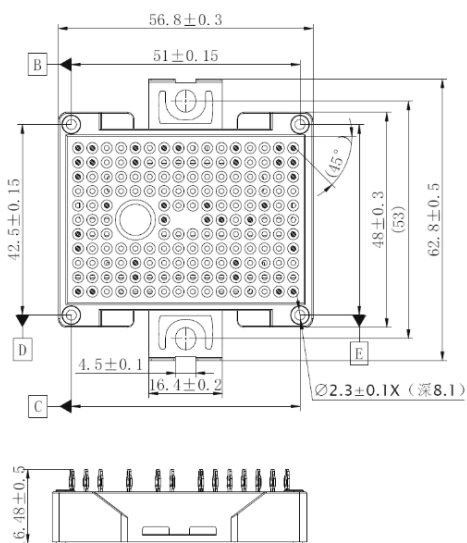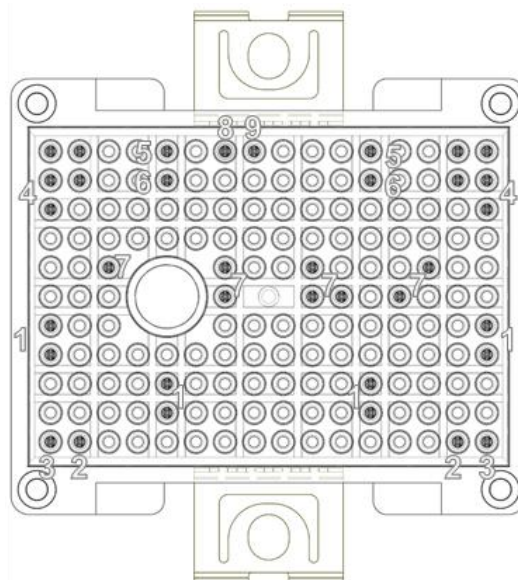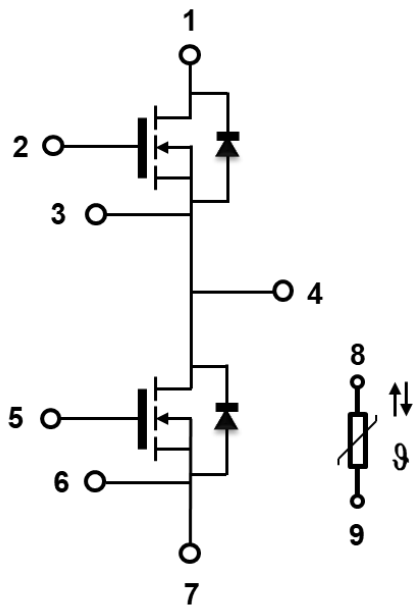

6、 Test conditions

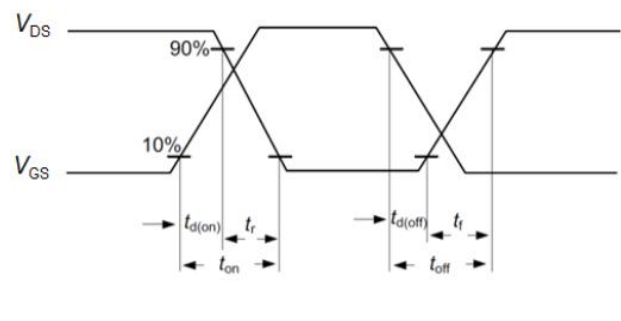


Figure A. Definition of switching times

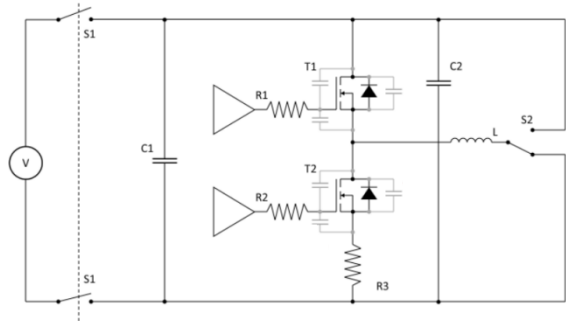


Figure B. Dynamic test circuit

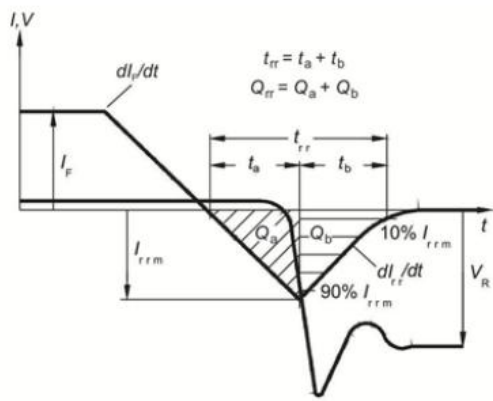


Figure C. Definition of diode switching characteristics

Figure C. Definition of body diode switching characteristics

1200V SiC Power MOSFET Module

Revision history

Document version	Date of release	Description of changes	
V01_00	2024-06-21	Initial files	
V01_01	2025-02-21	Final files	

Attention

1. RoHS compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/ EC (RoHS2), as implemented January 2, 2013.

2. REACH compliance

REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact a Sichain representative to insure you get the most up-to-date REACH SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request.

3. With respect to information regarding the application of the product, Sichain hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

4. Any information given in this documents subject to customer's compliance with its obligations and any applicable legal requirements, norms and standards concerning any use of the product of Sichain in any customer's applications.

5. Specifications of any and all products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment.

6. Due to technical requirements products may contain dangerous substances. For information on the types in question please contact Sichain office.

S1P05R120HBB



7. Except as otherwise explicitly approved by Sichain in a written document signed by authorized representatives of Sichain, Sichain' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

8. For use of our products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a Sichain representatives, for example but not limited to: transportation equipment, primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, and power transmission systems.